

A high-resolution (lander mosaic) was transformed to produce the denotative presentation of the horizon. Lander fit was removed from the projection. A second transformation was used to connect elevation angles relative to the local vertical to a radius function and azimuth relative to north to a circular function. The result is a polar stereographic projection with the property that camera distortions resulting from different sampling at different elevations are removed. I.P.L. Picture I.D. 78/01/03/185404.



DESCRIPTION OF SCENE

A panorama of Chryse Planitia landing site shows a varied landscape. The surface is strewn with rocks in the centimeter to meter-size range. Large drifts of red, very fine grained (about 100 μ m), "dusty" material dominate the center of the scene (line 330, sample 5200); they are probably remnants of a thicker layer of fine-grained material that has been swept away by the wind. Footprint 2 of the lander (line 1400, sample 4800) is buried to a depth of 16.5 cm in one of the drifts. Small rock fragments blown out by the exhaust of the rocket engines during landing have made pits and tracks (line 1250, sample 3960) in the dusty material. Also, the jarring of the surface by the lander during touchdowns formed cracks in the surface of several drifts (line 1382, sample 5920). A large rock that has been split in two parts in the center of the scene (line 250, sample 4050) has a cap of the dusty material. The rock is about 2 m across and about 9 m from the lander.

Viking Lander 1 rests on the martian surface between two small craters whose rims form prominent ridges on the horizon. (See Viking Orbiter picture to the right). The rim of crater H (line 100, sample 1250), about 100 m in diameter, forms a ridge about 50 m west of the lander. The lander is tilted downward 3° in this direction. Southeast of the lander, the rim of Crater C, about 150 m in diameter, forms the horizon about 80 m away. Several blocks (line 66, sample 6800) as large as 3 m across rest on this rim. One of several wrinkle ridges, known as "White Mesa" (line 80, sample 5200), forms the horizon about 1.2 km east of the lander.

Most picture-taking sequences for the Viking cameras were planned to include as much of the martian surface as possible. However, the camera could not avoid some parts of the lander. Those parts that are visible in the panorama, from left to right, are: cover of one of two Radioisotope Thermoelectric Generators (RTG) (line 340, sample 690); 11H relay antenna (line 426, sample 1100); one of three photometric calibration charts for the cameras (line 600, sample 950); solenometer (line 580, sample 1200); upper mounting structure and stroke gauge of leg 1 (line 420, sample 1600); mast of the high-gain 3-horn antenna (line 100, sample 1920); cover of the second RTG (line 550, sample 2700); upper mounting structure and stroke gauge of leg 2 (line 800, sample 4300); shock absorber of leg 2 (line 1000, sample 4500); meteorology boom (line 400, sample 5000); mast cleaning brush (line 1200, sample 5800); and part of the surface sampler instrument (line 700, sample 7750). The lower-most edge of the scene is about 1.7 m from the camera.

A trench dug by the surface sampler for soil analysis on board the lander is visible near the center of the scene (line 800, sample 5300) to the right of the hinge of the meteorology boom. It is about 8.5 cm wide and 70 cm long.

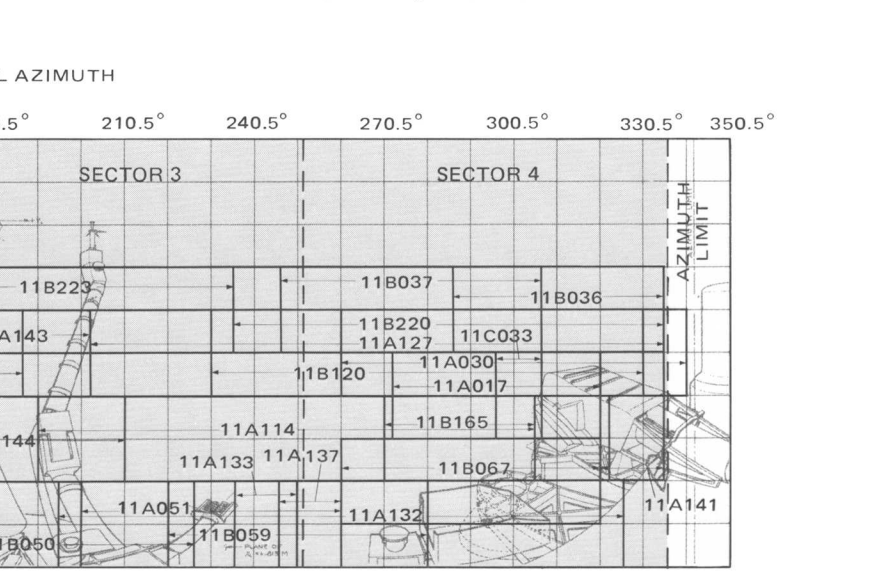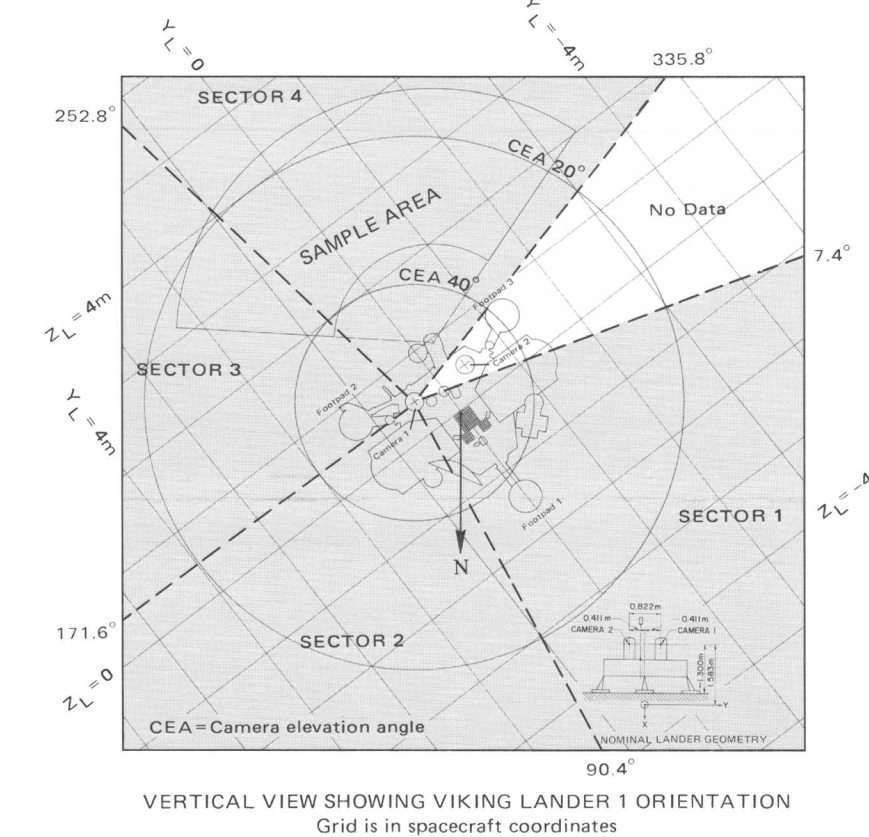

THE VIKING MISSION

Two Viking spacecraft, each consisting of an orbiter and lander, were launched from Kennedy Space Center on August 20 and September 9, 1975. The Viking 1 spacecraft arrived at Mars on June 19, 1976, and was placed in a highly elliptic orbit around the planet at a perianth altitude of nearly 1500 km. The orbiter camera was used in conjunction with other instrumental methods to find a suitable landing site for the lander. After about 30 days in orbit, the lander was separated from the orbiter, and on July 20, 1976, Viking Lander 1 touched down on the surface of Mars at lat 22.487° N and long 47.968° W. (Moore and Jones, 1980) on the west edge of a large basin called Chryse Planitia. It landed in a stable position at a 3° tilt downward in the direction 284.9° clockwise from north.

The side of the lander on which the two cameras are mounted faces southeast. When the cameras are pointed in a direction normal to the front of the lander, the viewing direction is 141.6° clockwise from north along the horizon. The first picture from the surface of Mars, of an area near the lander's footprint 3, was taken immediately after landing by camera 1. During the ensuing 43 days, the cameras responded to all commands and successfully carried out their assigned mission. On September 2, the activities of Lander 1 were reduced to accommodate the planned receipt of data from Viking Lander 2.

On September 3, 1976, Viking Lander 2 successfully landed on Utopia Planitia of Mars (47.966° N, 225.736° W.), more than 6500 km northeast of Lander 1 (Moore and Jones, 1977; Davies and others, 1978). Lander 2 faces approximately north and tilts 8.2° downward in the direction of 274.4° clockwise from north. The viewing direction of its cameras when pointed in a direction normal to the front of the lander is 297.7° clockwise from north along the horizon. The cameras on Viking Lander 2 operated successfully for 61 days until the primary mission of both landers was completed on November 15, 1976, at solar conjunction.

During the primary mission, 454 pictures of the martian surface were processed from Viking Lander 1 data and 582 pictures from Viking Lander 2 data. The extended mission of Viking began December 15, after solar conjunction, and ended in June 1978. During this period, an additional 1036 pictures were obtained from Lander 1 data and 1311 pictures from Lander 2 data. A comprehensive description of the Viking primary mission and the results of eight scientific experiments on board the landers were published in the *Journal of Geophysical Research*, v. 82, no. 28, Sept. 30, 1977; see References.

*Latitude is aerographic (see de Vaucouleurs and others, 1973).



Viking Orbiter picture 452810, 452811 showing the location of Viking Lander 1. Prominent ridges on the horizon in the lander pictures are designated by numbers; craters are designated by letters.

VIKING LANDER MOSAICS

The Viking Lander cameras acquired many high-resolution pictures of the Chryse Planitia and Utopia Planitia landing sites. Each picture is the product of computer processing on Earth of digital-image data transmitted from Mars as a result of "camera events" carried out by one of the lander camera systems. Further computer processing of data from a selected number of these events yielded a total of 10 mosaics. Two pairs of mosaics from Lander 1 data (one mosaic from each camera consisted of one pair made from data taken in the morning (0700-0800 hours) and one pair made with data acquired in mid-afternoon (1400-1530 hours)). Similarly, three pairs of mosaics for the Lander 2 site consisted of one pair between 0700 and 0800 hours, one pair at noon, and one pair between 1700 and 1800 hours.

Procedures used for processing the Viking Lander camera data were described by Levinthal and others (1977). The individual camera events used in each mosaic are identified in the outline of the accompanying camera view. Detailed descriptions and reproductions of these camera events were given by Tucker (1978). Copies of the Viking Lander pictures can be obtained from the National Space Science Data Center, Goddard Space Flight Center, Greenbelt, MD, 20771.

The Lander camera system (Huck and others, 1973a) has selectable focus settings for a depth of field from 1.2 m to infinity in the high-resolution (0.64° instantaneous field of view) mode. The survey (low-resolution) mode has an instantaneous field of view of 0.12°; this mode was used in the mosaics only where no high-resolution data were acquired.

Each complete mosaic extends 342.5° in azimuth, from approximately 3° above the horizon to 40° below. A complete mosaic incorporates approximately 15 million picture elements (pixels). In order to manage the processing of such large data bases, each mosaic was compiled from four individual azimuthal sectors.

Most of the data used in the mosaics were selected from the primary mission. In some cases, extended-mission data were included where primary-mission coverage was absent or where the surface was obscured by the sampler arm. Further selection was made on the basis of optimum focus.

The image data were photoelectrically corrected (black and others, 1975b; Patterson and others, 1977; Wolfe and others, 1977) for differences caused by variations in exposure and for solar-lighting differences caused by minor time-of-day variations in the pictures of the scene. The geometry was then transformed to a local Mars horizon and corrected for geometric camera errors (Patterson and others, 1977; Wolfe, 1979). The corrected pixels comprising the mosaic were then combined by the computer into a single image, and an optimum contrast correction was applied.

The mosaics are composites of the best pixels of all the Lander pictures used for each sector. In the computer matching process, the image data derived from the camera events for each sector were assigned priorities on the basis of quality of data. These data were examined by the computer in sequence according to the priorities, and the best pixels of each data set were used for the mosaic.

The computer formatting of the Viking Lander mosaics was done at the Image Processing Laboratories of the Jet Propulsion Laboratory of the California Institute of Technology, Pasadena, Calif., under the general supervision of Robert C. Levinthal of the Department of Genetics, Stanford University, who represented the Viking Lander Imaging Team. A detailed description of the multiple steps involved in the construction of the Viking Lander mosaics and an acknowledgment of the many people who assisted in the project were given by Levinthal (1980).

GEOMETRY OF THE MOSAICS

The cameras on the Viking Lander acquire data by sampling in equal increments of elevation and azimuth angle. In the accompanying mosaic, 2.9 mm subtends a 1° horizontal or vertical angle, regardless of the place of measurement within the panorama. If the martian surface were flat, one pixel (0.64° on the surface) would be 1 mm wide at 40° camera elevation and 2 m wide at the horizon 3 km away. Characteristically for this type of imaging system, most straight lines in the scene appear curved in the reconstruction. This representation of the picture data differs from that of a conventional camera having "point perspective" picture geometry, in which rays are projected from object space, through the perspective point in the camera lens, to an image plane in the camera.

The geometry of the Lander pictures is complicated by additional factors. Because both landers are tilted with respect to the horizon, on the uncorrected pictures the horizon resembles a sine curve. Computer rectification of the pictures results in a straight horizon along which vertical angles can be measured with respect to the local gravity vector, and horizontal angles can be measured from martian north. These angles are not related in any simple way to the azimuth and elevation angles given in "camera coordinates" for the unrectified pictures.

There are other geometric distortions due to the camera: optic path distortion that affects a light ray after it passes the camera windows; and camera-system distortions, or "bold-down" errors, that are caused by the way the cameras are mounted on the lander. The geometric transformation used in creating the mosaics took into account the optic path distortion but not the "bold-down" errors. However, along the horizon, the error in azimuth angle is equal to the rotational "bold-down" error for each camera to an accuracy of less than 1 pixel. The scale "azimuth angles from Mars north" has been adjusted to take into account this correction.

The residual azimuth angle errors are less than 1 pixel along the horizon and become larger with steeper elevation angles and large Lander tilts. For the worst case, Lander 2, camera 1, this error is a maximum of 5.1° (1 pixel at 40° elevation). The somewhat sinusoidal azimuth-dependent residual elevation error is a maximum of 3.1° (1 pixel for Lander 2, camera 1, and approximately 1 pixel for the other cameras).

REFERENCES

Dryden, M. E., Katsarova, I. Y., and Roth, J. A., 1978, Control net of Mars: February 1978. Rand Corp. R-2309-NASA-91 p.

Hack, F. O., McCall, H. F., Patterson, W. K., and Taylor, G. R., 1975a, The Viking Mars Lander camera. Space Science Instruments, v. 1, no. 2, p. 189-241.

Hack, F. O., Barber, E. F., Taylor, E. J., and Wall, S. D., 1975b, Radiometric performance of the Viking Mars Lander camera. U.S. National Aeronautics and Space Administration Technical Memorandum TMX-7492.

Levinthal, R. C., and Jones, K. L., 1980, The mosaic of Mars as seen by the Viking Lander camera. NASA Contract Report 3126.

Levinthal, R. C., Green, William, Jones, K. L., and Tucker, Robert, 1977, Processing the Viking Lander camera data. Journal of Geophysical Research, v. 82, no. 28, p. 4412-4420.

Moore, J. R., Blackburn, W. T., Tolson, R. H., Michael, W. H., Jr., Kelly, G. M., Breckle, J. P., and Komarek, T. A., 1977, Lander location, Mars physical ephemeris, and solar system parameters. Determination from Viking Lander tracking data. Journal of Geophysical Research, v. 82, no. 28, p. 4297-4303.

Moore, J. R., and Jones, K. L., 1976, Viking 1 Lander on the surface of Mars: Revised location. Icarus, v. 44, no. 1, p. 217-222.

Patterson, R. C., and Jones, K. L., 1977, Calibration of the Viking Lander camera. Journal of Geophysical Research, v. 82, no. 28, p. 4401-4409.

Tucker, R. B., 1978, Viking Lander imaging investigation: picture catalog of primary mission camera data record. National Aeronautics and Space Administration Reference Publication 1007, 558 p.

de Vaucouleurs, G. D., Davies, M. E., and Strom, J. M., Jr., 1973, The Martian 9° aerographic coordinate system. Journal of Geophysical Research, v. 78, no. 20, p. 4395-4404.

Wolfe, M. R., 1979, Viking Lander camera geometric calibration report: California Institute of Technology, Jet Propulsion Laboratory (in press).

Wolfe, M. R., Almond, D. L., and Merrill, M. E., 1977, Viking Lander camera radiometry calibration report. California Institute of Technology, Jet Propulsion Laboratory Publication 77-62, v. 1, 90 p.