

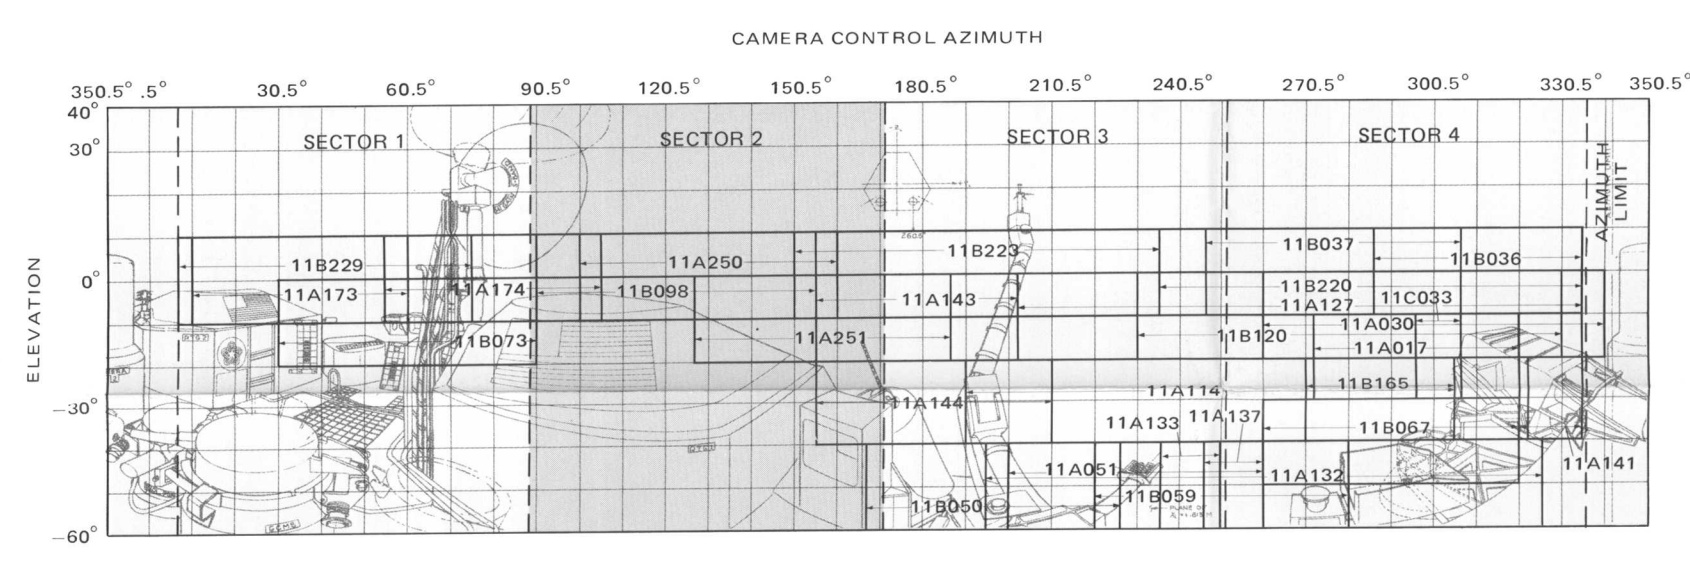


IP: PILE ID 77-15-03-001934
TAPE NO. DMS 607
JET PROPULSION LABORATORY

Interior - Geological Survey, Reston, Va. - 1982 - I-13145

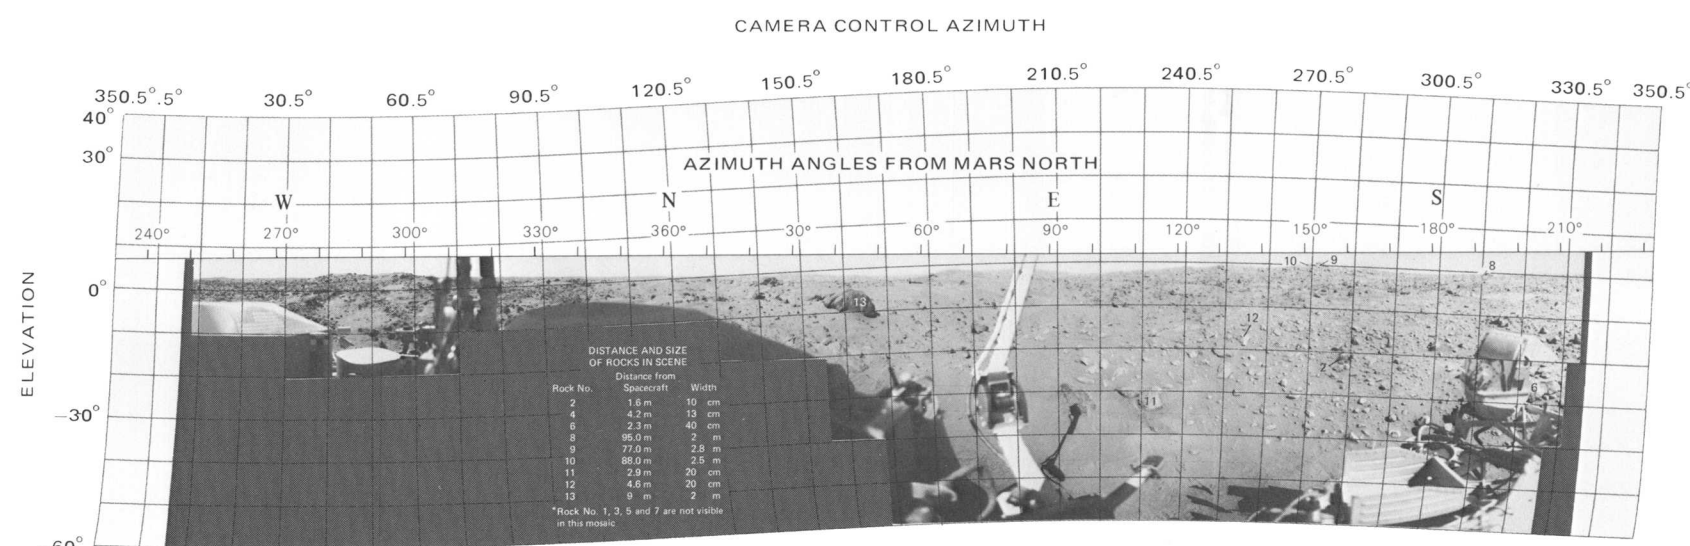

OUTLINE OF CAMERA 1 VIEW SHOWING CAMERA EVENTS USED IN MOSAIC

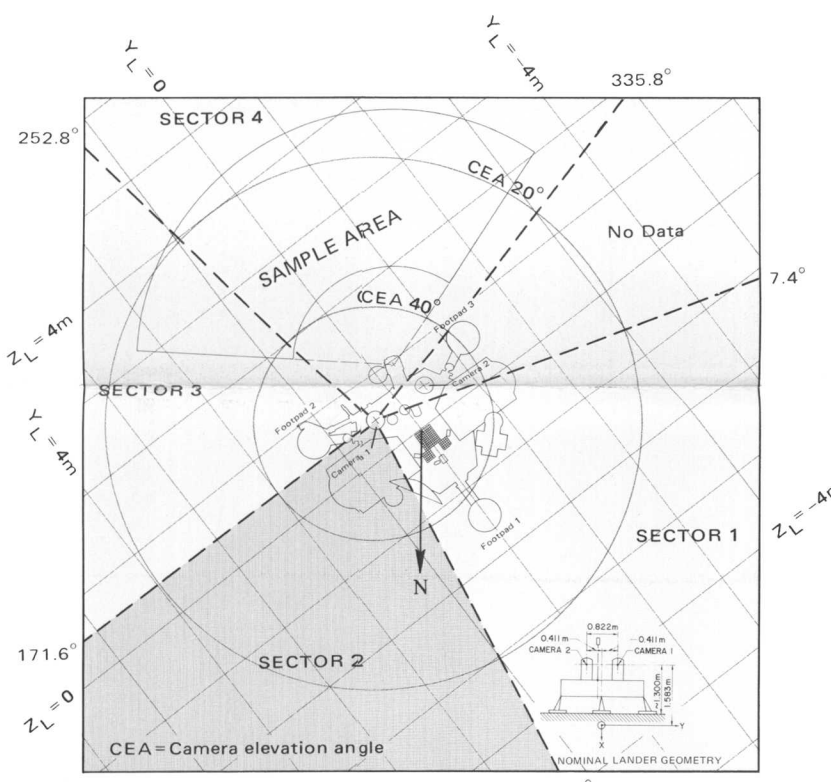

COMPLETE MOSAIC, EVENING SCENE, CAMERA 1
(Corrected for tilt)

DESCRIPTION OF SCENE

The area north of the lander is dominated by drifts of fine-grained material (about 100 μm) that covers much of the surface. The drifts are probably remnants of a thicker layer of material that has been swept away by the wind. The large rock on the right that has been split in two (line 230, sample 4050) is about 2 m across, 1 m high, and about 9 m from the lander. Its cap of fine-grained material suggests that it was once buried by this material. The large rock is part of a boulder field that can be seen beyond it (line 150, sample 3550). This field is probably part of a ray of material from a nearby impact crater. Part of the rim of the 160-m-diameter crater 2 can be seen (line 100, sample 3700) on the horizon northeast of the lander.

The side of the lander on which the two cameras are mounted faces southeast. When the cameras are pointed in a direction normal to the front of the lander, the viewing direction is 141.6° clockwise from north along the horizon. The first picture from the surface of Mars, of an area near the lander's footpad 3, was taken immediately after landing by camera 2. During the ensuing 43 days, the cameras responded to all commands and successfully carried out their assigned mission. On September 2, the activities of Lander 1 were reduced to accommodate the planned receipt of data from Viking Lander 2.

On September 3, 1976, Viking Lander 2 successfully landed on Utopia Planitia of Mars (45°96' N, 222°78' W), more than 6500 km northeast of Lander 1 (Morris and others, 1977; Davies and others, 1978). Lander 2 faces approximately north and tilts 8.2° downward in the direction of 277.4° clockwise from north. The viewing direction of its cameras when pointed in a direction normal to the front of the lander is 20.0° clockwise from north along the horizon. The cameras on Viking Lander 2 operated successfully for 61 days until the primary mission of both landers was completed on November 15, 1976, at solar conjunction.

During the primary mission, 454 pictures of the martian surface were processed from Viking Lander 1 data and 582 pictures from Viking Lander 2 data. The extended mission of Viking began December 15, after solar conjunction, and ended in June 1978. During this period, an additional 1636 pictures were obtained from Lander 1 data and 1311 pictures from Lander 2 data. A comprehensive description of the Viking primary mission and the results of eight scientific experiments on board the landers were published in the Journal of Geophysical Research (v. 82, no. 28, Sep. 30, 1977; see References).

*Latitudes are areographic (see de Vaucouleurs and others, 1973).

THE VIKING MISSION

Two Viking spacecraft, each consisting of an orbiter and lander, were launched from Kennedy Space Center on August 20 and September 9, 1975. The Viking 1 spacecraft arrived at Mars on June 19, 1976, and was placed in a highly elliptic orbit around the planet at a perihelion altitude of nearly 1500 km. The other camera were used in conjunction with other instrumental methods to find a suitable landing site for the lander. After about 20 days in orbit, the lander was separated from the orbiter, and on July 20, 1976, Viking Lander 1 touched down on the surface of Mars at lat. 22.483° N and long. 47.968° W (Morris and Jones, 1980) on the west edge of a large basin called Chryse Planitia. It landed in a stable position at a 7° tilt downward in the direction 284.9° clockwise from north.

The image data used in the mosaics were selected from the primary mission. In some cases, extended mission data were included where primary mission coverage was absent or where the surface was obscured by the sampler arm. Further selection was made on the basis of optimum focus.

The image data were photometrically corrected (Huck and others, 1975b; Patterson and others, 1977; Wolfe and others, 1979) for differences caused by variations in exposure and for solar-lighting differences caused by minor time-of-day variations in the pictures. The geometry was then transformed to a local Mars horizon and corrected for geometric camera errors (Patterson and others, 1977; Wolfe, 1979). The corrected pictures composing a sector were then combined by the computer into a single image, and an optimum contrast correction was applied.

The mosaics are composites of the best pixels of all the Lander pictures used for each sector. In the computer masking process, the image data derived from the camera systems for each sector were assigned priorities on the basis of quality of detail. These data were examined by the computer in sequence according to the priorities, and the best pixels of each data set were used for the mosaic.

The computer formatting of the Viking Lander mosaics was done at the Image Processing Laboratories of the Jet Propulsion Laboratory of the California Institute of Technology, Pasadena, Calif., under the general supervision of Elliott C. Leinhardt of the Department of Genetics, Stanford University, who represented the Viking Lander Imaging Team. A detailed description of the multiple steps involved in the construction of the Viking Lander mosaics and an acknowledgment of the many people who assisted in the project were given by Leinhardt (1980).

VIKING LANDER MOSAICS

The Viking Lander camera acquired many high-resolution pictures of the Chryse Planitia and Utopia Planitia landing sites. Each picture is the product of computer processing of Earth of digital-image data transmitted from Mars as a result of "camera events" carried out by one of the lander camera systems. Further computer processing of data from a selected number of these events yielded a total of 10 mosaics. Two pairs of mosaics from Lander 1 data (one mosaic from each camera) consisted of one pair made from data taken in the morning (0700-0800 hours) and one pair made with data acquired in midafternoon (1400-1530 hours). Similarly, three pairs of mosaics for the Lander 2 site consisted of one pair between 0700 and 0800 hours, one pair at noon, and one pair between 1700 and 1800 hours.

Procedures used for processing the Viking Lander camera data were described by Leinhardt and others (1977). The individual camera events used in each mosaic are identified in the outline of the accompanying camera view. Detailed descriptions and reproductions of these camera events were given by Tucker (1978). Copies of the Viking Lander pictures can be obtained from the National Space Science Data Center, Goddard Space Flight Center, Greenbelt, MD, 20771.

The Lander camera system (Huck and others, 1975a) has selectable focus settings for a depth of field from 1.2 m to infinity in the high-resolution (0.04" instantaneous field of view) mode. The narrow (low-resolution) mode has an instantaneous field of view of 0.17"; this mode was used in the mosaics only where no high-resolution data were acquired. Each complete mosaic extends 34.25" in azimuth, from approximately 2° above the horizon to 60° below. A complete mosaic incorporates approximately 15 million picture elements (pixels). In order to manage the processing of such large data bases, each mosaic was compiled from four individual azimuthal sectors.

Most of the data used in the mosaics were selected from the primary mission. In some cases, extended mission data were included where primary mission coverage was absent or where the surface was obscured by the sampler arm. Further selection was made on the basis of optimum focus.

The image data were photometrically corrected (Huck and others, 1975b; Patterson and others, 1977; Wolfe and others, 1979) for differences caused by variations in exposure and for solar-lighting differences caused by minor time-of-day variations in the pictures. The geometry was then transformed to a local Mars horizon and corrected for geometric camera errors (Patterson and others, 1977; Wolfe, 1979). The corrected pictures composing a sector were then combined by the computer into a single image, and an optimum contrast correction was applied.

The mosaics are composites of the best pixels of all the Lander pictures used for each sector. In the computer masking process, the image data derived from the camera systems for each sector were assigned priorities on the basis of quality of detail. These data were examined by the computer in sequence according to the priorities, and the best pixels of each data set were used for the mosaic.

vertical camera having "point perspective" picture geometry, in which rays are projected from object space, through the perspective point in the camera lens, to an image plane in the camera.

The geometry of the lander pictures is complicated by additional factors. Because both landers are tilted with respect to the horizon, on the uncorrected pictures the horizon resembles a sine curve. Computer rectification of the pictures results in a straight horizon along which vertical angles can be measured with respect to the local gravity vector, and horizontal angles can be measured from meridian north. These angles are not related in any simple way to the azimuth and elevation angles given in "camera coordinates" for the uncorrected pictures.

There are other geometric distortions due to the camera: optic path distortion that affects a light ray after it passes the camera windows; and camera-system distortions, or "bolt-down" errors, that are caused by the way the cameras are mounted on the lander. The geometric transformation used in creating the mosaics took into account the optic path distortion but not the "bolt-down" errors. However, along the horizon, the error in azimuth angle is equal to the rotational "bolt-down" error for each camera to an accuracy of less than 1 pixel. The scale "azimuth angles from Mars north" has been adjusted to take into account this correction.

The residual azimuth angle errors are less than 1 pixel along the horizon and become larger with steeper elevation angles and larger lander tilts. For the worst case, Lander 2, camera 1, this error is a maximum of 5.7 pixels at 60° elevation. The somewhat sinusoidal azimuth-dependent residual elevation error is a maximum of 3 pixels for Lander 2, camera 1, and approximately 1 pixel for the other cameras.

Davies, M. E., Katayama, F. Y., and Robb, J. A., 1978, Control net of Mars, February 1978, Rand Corp. R-2309, NASA 91 P.

Huck, J. O., McCabe, H. E., Patterson, W. R., and Taylor, G. R., 1975a, The Viking Mars Lander camera: Space Science Instruments, v. 1, no. 2, p. 189-241.

Huck, J. O., Buscher, E. L., Taylor, G. R., and Wall, S. D., 1975b, Radiometric performance of the Viking Lander camera: U.S. National Aeronautics and Space Administration Technical Memorandum TMX72697.

Leinhardt, E. C., and Jones, K. L., 1980, The mosaics of Viking Lander camera data: Journal of Geophysical Research, v. 82, no. 28, p. 4412-4420.

Morris, A. P., Blackshear, W. T., Tolson, R. H., Michael, W. H., Jr., Kelly, G. M., Brenkle, J. P., and Komarek, T. A., 1977, Lander beacons, Mars physical ephemeris, and solar system parameters: Determination from Viking Lander tracking data. Journal of Geophysical Research, v. 82, no. 28, p. 4373-4393.

Morris, E. C., and Jones, K. L., 1980, Viking 1 Lander on the surface of Mars: Revised location. Lunar, v. 44, no. 1, p. 217-222.

Patterson, W. R., III, Huck, J. O., Wall, S. D., and Wolfe, M. R., 1977, Calibration and performance of the Viking Lander camera: Journal of Geophysical Research, v. 82, no. 28, p. 4491-4499.

Tucker, R. B., 1978, Viking Lander imaging investigation: picture catalog of primary mission experiment data record: National Aeronautics and Space Administration Reference Publication 1007-538 P.

de Vaucouleurs, G. D., Davies, M. E., and Sturm, F. M., Jr., 1973, The Mars 1976 areographic coordinate system: Journal of Geophysical Research, v. 78, no. 20, p. 4395-4404.

Wolfe, M. R., 1979, Viking Lander camera geometric calibration report: California Institute of Technology, Jet Propulsion Laboratory, (in press).

Wolfe, M. R., Atwood, D. L., and Morrill, M. E., 1977, Viking Lander camera radiometry calibration report: California Institute of Technology, Jet Propulsion Laboratory Publication 77-62, v. 1, 90 p.

VIKING LANDER 1 RECTIFIED PHOTOMOSAIC
EVENING SCENE - CAMERA 1 - SECTOR 2